


PowerTech™


6068TFM50 Diesel Engine

Propulsion Engine Specifications

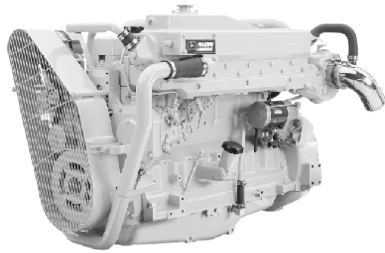

6068TFM50 shown

Dimensions

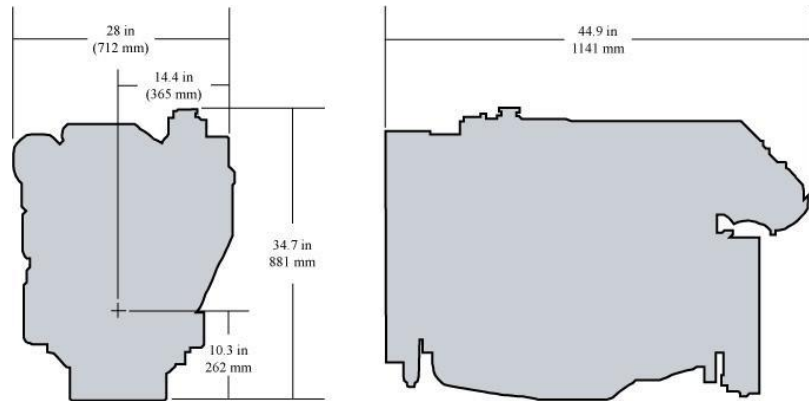

Certifications

IMO COMPLIANT

General data

Model	6068TFM50	Length - mm (in)	1141 (44.9)
Number of cylinders	6	Width - mm (in)	712 (28.0)
Displacement - L (cu in)	6.8 (415)	Height-- mm (in)	881 (34.7)
Bore and Stroke-- mm (in)	106 x 127 (4.17 x 5.00)	Weight, dry-- kg (lb)	730 (1609)
Compression Ratio	17.0:1	Maximum Installed Angle	Front Up – degrees 9 Front Down – degrees 0
Engine Type	In-line, 4- Cycle		
Aspiration	Turbocharged		

Features and benefits

Watercooled Turbocharger and Exhaust Manifold

- Cooler and quieter environment for vessel and crew

Replaceable Wet-type Cylinder Liners

- Excellent heat dissipation
- Hardened and precision machined for long life
- Rebuild to original specifications

Corrosion Resistant Components

- Provides engine protection from the effects of seawater

Either-side Service

- Oil fill and dipstick combinations
- Remote oil filter for easier service access
- Application and service flexibility to provide installation convenience plus fast and easy maintenance

Heat exchanger or Keel Cooled

- High-capacity heat exchanger designed for reliable operation in adverse conditions
- Integrated expansion tank, heat exchanger and exhaust manifold reduce chances of leaks
- Keel cooler or heat exchanger options provide application flexibility


High Torque and Low Rated RPM

- Enables the engine to turn larger propellers at lower speed for best efficiency
- Excellent vessel control and maneuvering
- Lower rated rpm limits vibration and noise for better crew comfort


Fuel System

- Proven and reliable Mechanical Governor


Performance curve

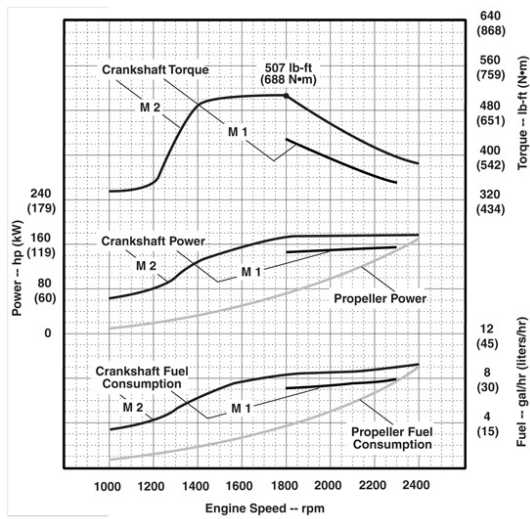


M1, M2 PERFORMANCE CURVE

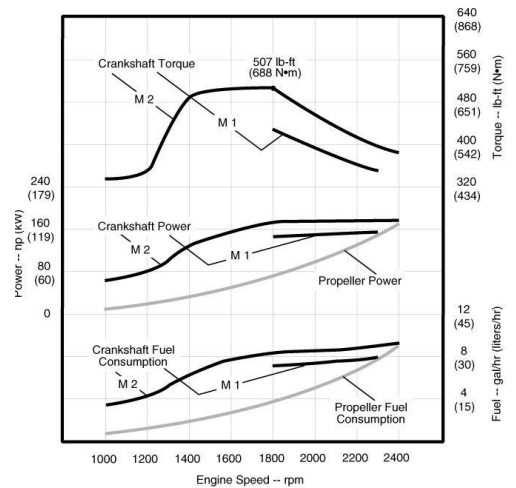

M3, M4 PERFORMANCE CURVE

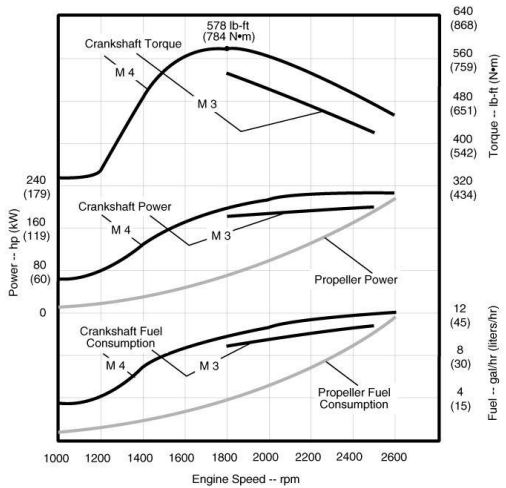

M3, M4 PERFORMANCE CURVE

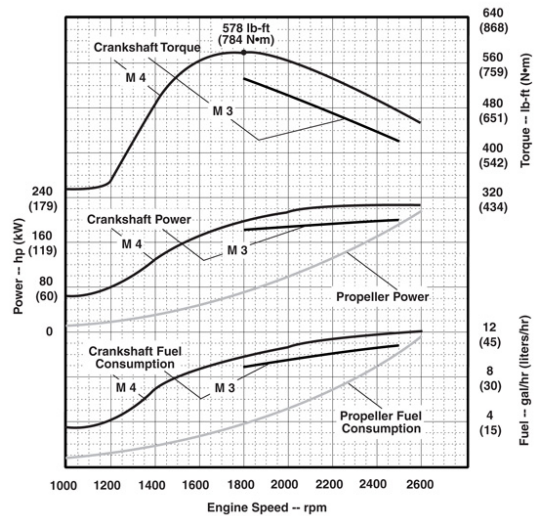

Performance data	M4	M3	M2	M1
Rated Power - kW (hp)	168 (225)	149 (200)	130.5 (175)	115 (154)
Rated Speed - rpm	2600	2500	2400	2300
Low Idle Speed - rpm	650	null	650	null
Peak Torque - Nm (ft-lb)	780 (575)	null	684 (504)	null
Peak Torque Speed - rpm	1800	null	1800	null
Fuel Consumption - L/h (gal/hr)	46.8 (12.4)	null	36.3 (9.6)	null

M rating	M4	M3	M2	M1
Typical load factor	< =40%	< =50%	< =65%	< 65%
Typical annual usage (hr)	1,000-3,000 hr	2,000-4,000 hr	3,000-5,000 hr	Unrestricted
Typical full-power operation (hr)	1 of each 12 hr	4 of each 12 hr	16 of each 24 hr	Uninterrupted

John Deere Power Systems
 3801 W. Ridgeway Ave.
 PO Box 5100
 Waterloo, IA 50704-5100
 Phone: 1-800-533-6446
 Fax: 319.292.5075

John Deere Power Systems
Usine de Saran
 La Foulonnerie - B.P. 11.13
 45401 Fleury les Aubrais Cedex
 France
 Phone: 33.2.38.82.61.19
 Fax: 33.2.38.82.60.00

All values at rated speed and power with standard options unless otherwise noted. Specifications and design subject to change with out notice.